

CLASSIC GREASE 8217

Classic grease for micromechanics



Description

Very soft brown grease (Glissalube 20) which has a good lubricity. Developed for the lubrication of barrel drums it assures efficient braking.

This grease is recommended for the lubrication of all types of barrels.



Technical features (indicative values)

Appearance	Brown
Penetration	330 1/10 mm
Consistency	Very soft
Drop point	> 180 °C
Acidity	0.5 mg KOH / g


Unctuousness / Lubricity	
Viscosity / Texture	
Ageing resistance / Stability	
Adhesion / Grip	
Compatibility	Metals and certain polymers
Application	Barrel wall
Shelf life	3 years
Temperature range	-40 °C to +80 °C

Application fields

Classic grease to be used for :

- Precision micromechanics (watch, timer, measuring device , tools, ...)
- Instrumentation and counters (automotive, aeronautic, naval,...)
- Micro motors and stepper motors
- General mechanics (office equipment, fans,...)
- Ball bearings, parts of mechanisms
- Lubrication of the barrel wall

Radar chart

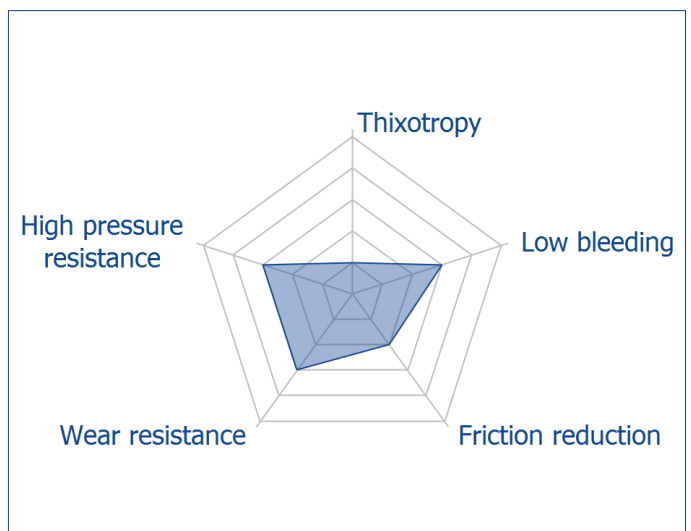

Storage

We advise keeping Moebius products in their original packaging in a clean and dry place, protected from light, ideally at a temperature of 15 to 26 °C.

After opening we recommend keeping the products for a maximum of 12 months.

